

Intelligent Linear Actuator

PSL202

AMS11

Positioner integrated

517 lbf

Max. thrust)¹

56.4 - 12.7 Secs/In.

Stroke Speed




max. 1.97 In.

Stroke

Modulating actuator
Class C acc. to DIN EN ISO
22153

Enclosure IP65

acc. to EN 60529

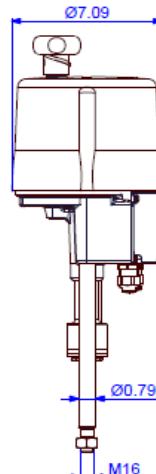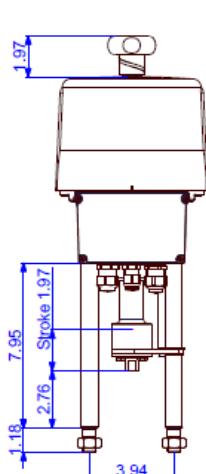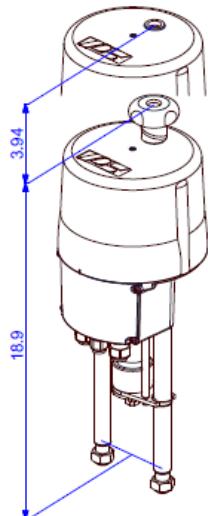

Dimensions are valid for connections M8-M12 only!

Approx. weight: 17.7 lb without accessories

Stroke Speed	56.4 - 28.2 Secs/In. (adjustable)			
Power supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²
Nominal current) ⁴ [A]	0.07	0.15	0.7(AC) / 0.4(DC)	0.08) ³
Max. current) ⁴ [A]	0.1	0.2	0.9(AC) / 0.6(DC)	0.11) ³
Power consumption) ⁵ [W]	13	13	12(AC) / 11(DC)	22) ³

Stroke Speed	25.4 - 12.7 Secs/In. (adjustable)			
Power supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²
Nominal current) ⁴ [A]	0.22	0.44	2.1(AC) / 1.3(DC)	0.1) ³
Max. current) ⁴ [A]	0.29	0.57	2.7(AC) / 1.7(DC)	0.13) ³
Power consumption) ⁵ [W]	38	38	35(AC) / 32(DC)	47) ³

Standard	Description
Ambient temperature [°F]	-4°F to +140°F
Motor protection	Electronic motor current monitoring with safety cut-off
Overvoltage category	II
Break away force	Adjustable up to + 50% nominal force
Duty cycle as per IEC 60034-1,8	S2 30 min S4 50% ED @ 77°F
Control signal and feedback	0 (4)..20 mA or 0 (2)..10 V selectable, split range operation
Binary control	24 V - 230 V for ON/OFF control (min. duration of pulse 1s)
Valve positioner function	Integrated, deadband adjustable from 0.5 .. 5%, shut-off MIN
Automatic start-up	Recognizing the end position(s) and autoscaling set and feedback values
Internal fault monitoring	Thrust, control signal, temperature, power supply
Fault indication relay FIR	Standard, potential-free opening contact provides a freely definable (programmable) collective fault signal and doubles for indication for when
Diagnostics function	Stores cumulated operation data (motor and total running time, number of motor starts) and data sets of current values (set value, feedback value, torque, temperature and error messages)
Communication interface	Connecting to a USB port and a software, allows data reading and parametrization
Conduit entries	2 pcs. M20 x 1,5 and 1 pcs. M16 x 1,5

)¹ = permissible average thrust over the entire travel is 50% of the max. thrust

)² = max. input voltage range

)³ = at 400 V 3~ and 50 Hz

)⁴ = data may vary depending on accessories

)⁵ = at max. thrust, data may vary depending on accessories

PSL202 AMS11


Standard equipment



Wiring Termination

1-Phasen Wechselspannung / DC 1-Phase AC / DC																3-Phasen 3-Phase AC													
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	(option)	RJ-45 TTL	Taster Button	L1	L2	L3	PE
↑↑	↑↑	↓↓	↓↓	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	PE	Schutzleiter / protective conductor	400 VAC	400 VAC	400 VAC	400 VAC	
+ 0(2) - 20 mA	+ 0(4) - 20 mA	GND	+ 0(2) - 10 V	+ 0(4) - 20 mA	24 VDC	max. 100 mA bei al. Load	N- (24V AC/DC - 230VAC)	U+ (24V AC/DC - 230VAC)	U+ ZU! CLOSE	N-	U+	ZU! OPEN	NI- (siehe Typenschild / see tag plate)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	(Option)	
Set value input	Active position feedback	Aktive Positions-rückmeldung	Störmeldung potentiellfrei	Binäre Ansteuerung	Netzausfall-signal	Versorgung	Istwert	Zu / Closed	Auf / Open	Versorgungs-spannung	Feldbus-Anschluß	PC Kommunikation	Inbetrieb-nahme	Versorgungs-spannung	Power supply voltage	Fieldbus Interface	PC communication	Com-missioning	Power supply	schaltzeit	Power supply voltage	schaltzeit	Power supply voltage	schaltzeit	Power supply voltage	schaltzeit	Power supply voltage	schaltzeit	
Galvanisch getrennt / Galvanically isolated 1 kV																				8013770 - S-217_G									

Dimensions of the PS standard adaptation

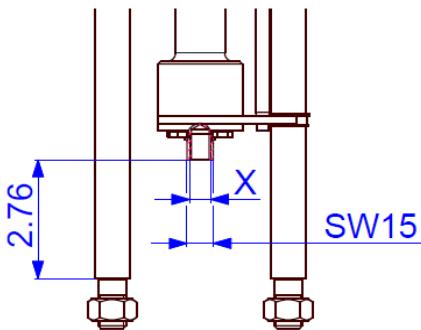


Connection Thread X

M8	Optional
M10	Optional
M12	Standard
M14	Optional
M16	Optional

Fine threaded and other sizes on request!

Dimensions are valid for connections M8-M12 only!

Mounting position

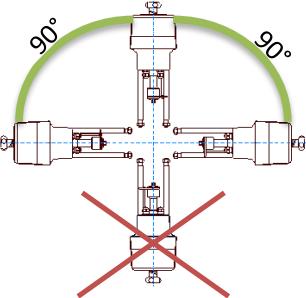

Accessories/Options

Position signal switches, mechanical	2WE	2 potential-free position switches, mechanical, with silverplated changeover contacts, 24V to 230 V AC/DC @ 0.1A- 10 A
Position signal switches gold, mechanical	2WE Gold	2 potential-free position switches, mechanical, with gold-plated changeover contacts
Integrated process controller	PSIC	5 V to 30 V AC/DC @ 1mA- 100 mA; contact resistance 30 mOhm
Fail-safe*	PSCP	Enables the autonomous control of a process so that an external controller is not required.
Fieldbus interface*		Emergency power supply based on supercapacitors, safety position OPEN, CLOSED or free defined position
Local control station	PSC.2	Digital transmission of nominal and actual value per mill or percent, report of monitoring and diagnostic data using Profibus DP (PSPDP) or CANopen (PSCA) interfaces, additional interfaces available on request
Remote local control		Illuminated display to show the actuator status and lockable selector to switch between modes: automatic, manual process ON/OFF, STOP and parameter menu. Control buttons for manual movement, menu operation and adjustment of parameters, display of diagnostic information
Data cable	PSCS-USB	Mounting separately from the actuator (incl. 10 m connection cable)
Fail-safe port*	FSP	USB data cable enables the communication between the actuator and a PC by using the software PSCS
IP67		Signal port to drive to a "safety position", selectable fail-safe position, standard 24 - 230 V
Heating resistor	HR	Standard 24 - 230 V
Heating resistor	HR	Increased enclosure IP67
Heating resistor	HR	Heating resistor to prevent condensation

*not retrofittable

For more information and accessories, please visit our website www.ps-automation.com!

Subject to changes!