



Intelligent Linear Actuator

Stroke 1.97 (IP65)

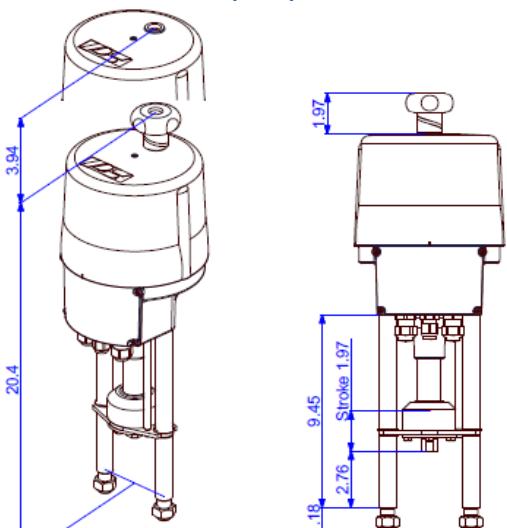

Approx. weight: 22.1 lb without accessories

Stroke 2.56 (IP67)

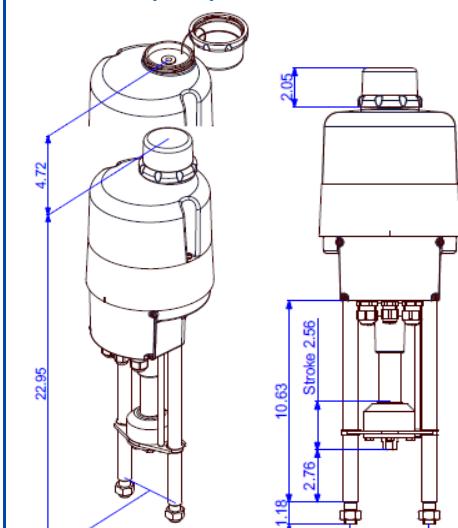

Approx. weight: 26.5 lb without accessories

Positioner integrated

2 248 lbf

Max. thrust)¹

127 - 14.9 Secs/In.

Stroke Speed

Stroke 1.97 In.

opt. 2.56 In.

Modulating actuator

Class C

DIN EN ISO 22153

Enclosure IP65

EN 60529

Stroke Speed

127 - 72.6 Secs/In. (adjustable)

Power supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²
Nominal current) ⁴ [A]	0.18	0.37	1.76(AC) / 1.1(DC)	0.15) ³
Max. current) ⁴ [A]	0.24	0.48	2.3(AC) / 1.4(DC)	0.2) ³
Power consumption) ⁵ [W]	32	32	30(AC) / 26(DC)	41) ³

PSL210
AMS11

Stroke Speed

29.89 - 14.9 Secs/In. (adjustable)

Power supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²
Nominal current) ⁴ [A]	0.42	0.84	4(AC) / 2.5(DC)	0.31) ³
Max. current) ⁴ [A]	0.55	1.1	5.3(AC) / 3.3(DC)	0.4) ³
Power consumption) ⁵ [W]	78	78	73(AC) / 61(DC)	82) ³

PSL210
AMS12

Standard

Description

Ambient temperature [°F]	-4°F to +140°F
Motor protection	Electronic motor current monitoring with safety cut-off
Oversupply category	II
Break away force	Adjustable up to +50% nominal force
Duty cycle as per IEC 60034-1,8	S2 30 min S4 50% ED @ 77°F
Control signal and feedback	0 (4)..20 mA or 0 (2)..10 V selectable, split range operation
Binary control	24 V - 230 V for ON/OFF control (min. duration of pulse 1s)
Valve positioner function	Integrated, deadband adjustable from 0.5 .. 5%, shut-off MIN
Automatic start-up	Recognizing the end position(s) and autoscaling set and feedback values
Internal fault monitoring	Thrust, control signal, temperature, power supply
Fault indication relay FIR	Standard, potential-free opening contact provides a freely definable (programmable) collective fault signal and doubles for indication for when optional Local Controls is NOT in remote mode
Diagnostics function	Stores cumulated operation data (motor and total running time, number of motor starts) and data sets of current values (set value, feedback value, torque, temperature and error messages)
Communication interface	Connecting to a USB port and a software, allows data reading and parametrization
Conduit entries	2 pcs. M20 x 1,5 and 1 pcs. M16 x 1,5


Standard equipment

)¹ = permissible average force over the entire travel is 50% of the max. thrust)² = max. input voltage range)³ = at 400 V 3~ and 50 Hz)⁴ = data may vary depending on accessories)⁵ = at max. thrust, data may vary depending on accessories

Wiring Termination


1-Phasen Wechselspannung / DC 1-Phase AC / DC																									
3-Phasen 3-Phase AC																									
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	PE	RJ-45 TTL	Taster Button
↑ + 0(2) - 10 V	↑ + 0(4) - 20 mA	↑ GND	↓ 24 VDC	↓ max. Last / max. Load	↓ 100 mA bei at 24 VDC	↑ U+ AUF/OPEN	↑ U-/ZU/CLOSE	N- 24 V AC/DC - 230 VAC	N- (24V AC/DC - 230VAC)	U+ (Option)	U- (Option)	21-40 VDC / 100 mA	+ 0(2) - 10 V	+ 0(4) - 20 mA	GND	(Option)									
Sollwert- Eingang Set value input	Aktive Position- rückmeldung Active position feedback	Störmeldung potentialfrei Monitor relay potential-free	Binäre Ansteuerung Binary input signals	Netz- ausfall- signal Fail safe signal	Versor- gung Supply	Istwert- bericht Actual value	Zu / Closed Position switch potential-free contact	Auf / Open Kontakt	Versorgungs- spannung Power supply voltage	Feldbus- Anschluß Fieldbus interface	PC Kommu- nikation PC commu- nication	Inbetrieb- nahme Com- missioning													
Galvanisch getrennt / Galvanically isolated 1 kV																									

8013770 - S-217_G

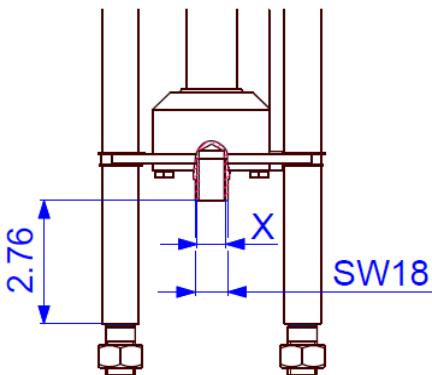Dimensions of the PS Standard AdaptationConnection Thread X

M8	Optional
M10	Optional
M12	Optional
M14	Optional
M16	Standard

Fine threaded and
other sizes on request!

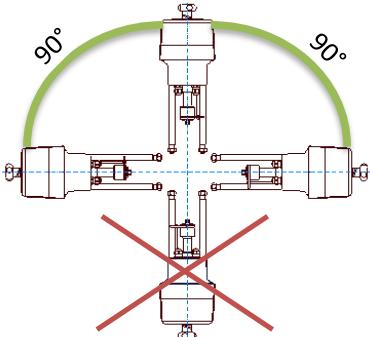Mounting Position**Accessories/Options**

Position signal switches	2WE	2 potential-free position switches, mechanical, with silverplated changeover contacts, 24V to 230 V AC/DC @ 0.1A- 5A
Position signal switches gold, mechanical	2WE Gold	2 potential-free position switches, mechanical, with gold-plated changeover contacts
Integrated process controller	PSIC	5 V to 30 V AC/DC @ 1mA- 100mA; contact resistance 30 mOhm
Fail-safe*	PSCP	Enables the autonomous control of a process so that an external controller is not required.
Fieldbus interface*		Emergency power supply based on supercapacitors, safety position OPEN, CLOSED or free defined position
Local control station	PSC.2	Digital transmission of nominal and actual value per mill or percent, report of monitoring and diagnostic data using Profibus DP (PSPDP) or CANOpen (PSCA) interfaces, additional interfaces available on request
Remote local control		Illuminated display to show the actuator status and lockable selector to switch between modes: automatic, manual process ON/OFF, STOP and parameter menu. Control buttons for manual movement, menu operation and adjustment of parameters, display of diagnostic information
Data cable	PSCS-USB	Mounting separately from the actuator (incl. 10 m connection cable)
Fail-safe port*	FSP	USB data cable enables the communication between the actuator and a PC by using the software PSCS
IP67		Signal port to drive to a "safety position", selectable fail-safe position, standard 24 - 230 V
Heating resistor	HR	Increased enclosure IP67
		Heating resistor to prevent condensation

*not retrofittable

For more information and accessories, please visit our website www.ps-automation.com!

Subject to changes!