


# Intelligent Linear Actuator

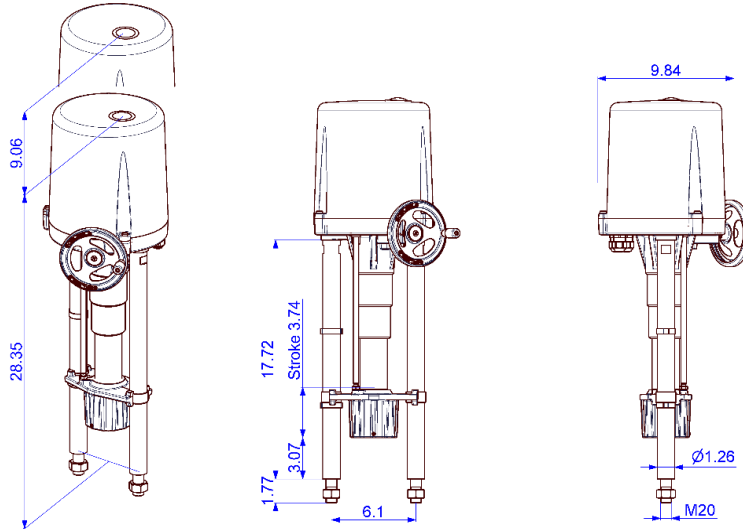

Approx. weight: 50.7 lb without accessories

PSL320-325  
AMS13

Positioner integrated

4 496/5 620 lbf  
Max. Thrust )<sup>1</sup>

127 - 63.5 Secs/In.  
Stroke Speed  
max. 3.74 In.  
Stroke

Modulating actuator  
Class C  
DIN EN ISO 22153

Enclosure IP65  
EN 60529

Stroke Speed	127 - 63.5 Secs/In. (adjustable)				PSL320 AMS13
Power Supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~ ) <sup>2</sup>	
Nominal Current ) <sup>4</sup> [A]	0.44	0.88	4.2(AC) / 2.6(DC)	0.32 ) <sup>3</sup>	
max. Current ) <sup>4</sup> [A]	0.57	1.15	5.5(AC) / 3.4(DC)	0.42 ) <sup>3</sup>	
Power Consumption ) <sup>5</sup> [W]	81	81	76(AC) / 63(DC)	85 ) <sup>3</sup>	

Stroke Speed	127 - 63.5 Secs/In. (adjustable)				PSL325 AMS13
Power Supply [V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~ ) <sup>2</sup>	
Nominal Current ) <sup>4</sup> [A]	0.48	0.95	4.6(AC) / 2.9(DC)	0.35 ) <sup>3</sup>	
max. Current ) <sup>4</sup> [A]	0.62	1.24	6(AC) / 3.7(DC)	0.42 ) <sup>3</sup>	
Power Consumption ) <sup>5</sup> [W]	88	88	82(AC) / 69(DC)	91 ) <sup>3</sup>	

Standard	Description	Standard equipment
Ambient temperature [°F]	-4°F to +140°F	
Motor protection	Electronic motor current monitoring with safety cut-off	
Overvoltage category	II	
Break away force	Adjustable up to +50% nominal force	
Duty cycle as per IEC 60034-1,8	S2 30 min S4 50% ED @ 77°F	
Control signal and feedback	0 (4)..20 mA or 0 (2)..10 V selectable, split range operation	
Binary control	24 V - 230 V for ON/OFF control (min. duration of pulse 1s)	
Valve positioner function	Integrated, deadband adjustable from 0.5 .. 5%, shut-off MIN	
Automatic start-up	Recognizing the end position(s) and autoscaling set and feedback values	
Internal fault monitoring	Thrust, control signal, temperature, power supply	
Fault indication relay FIR	Standard, potential-free opening contact provides a freely definable (programmable) collective fault signal and doubles for indication for when optional Local Controls is NOT in remote mode	
Diagnostics function	Stores cumulated operation data (motor and total running time, number of motor starts) and data sets of current values (set value, feedback value, torque, temperature and error messages)	
Communication interface	Connecting to a USB port and a software, allows data reading and parametrisation	
Conduit entries	3 pcs. M20 x 1,5	

)<sup>1</sup> = permissible average force over the entire travel is 50% of the max. thrust

)<sup>2</sup> = max. input voltage range

)<sup>3</sup> = at 400 V 3~ and 50 Hz

)<sup>4</sup> = data may vary depending on accessories

)<sup>5</sup> = at max. thrust, data may vary depending on accessories

