


Electric Quarter-Turn Actuator

PSQ503

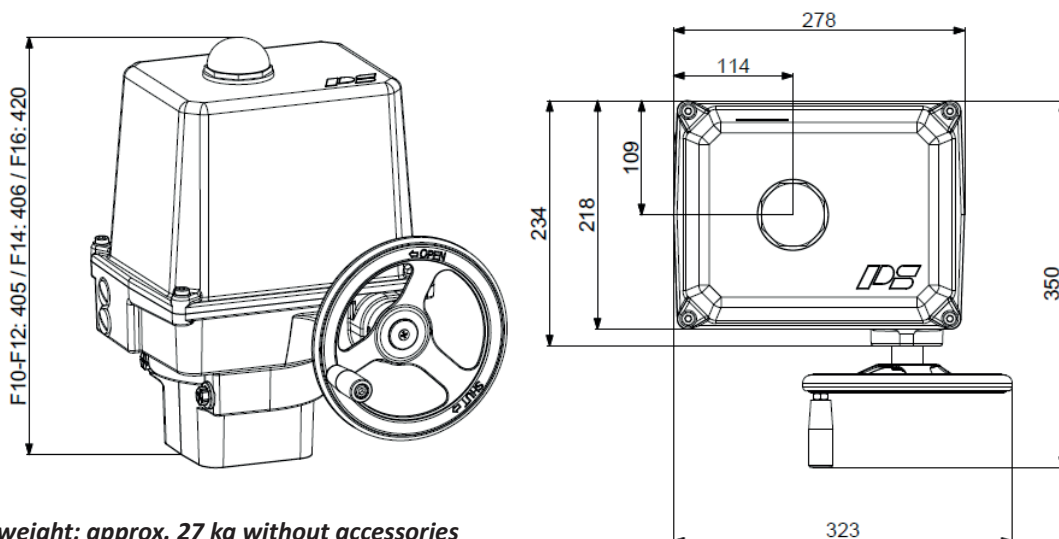

weight: approx. 27 kg without accessories

500 Nm

Switching torque)¹

12 s

Operating Time/90°

Flange

F10/F12/F14/F16

Modulating Actuator

Class C

acc. EN ISO 22153

Enclosure IP67

EN 60529


Operating Time/90°		12 s [50 - 60 Hz]
Power Supply	[V]	230 VAC 1~
Frequency	[Hz]	50 / 60
Normal Current	[A]	1.2
Maximum Current	[A]	6.4
Power Consumption) ²	[W]	300
Duty Cycle	IEC 60034-1,8	S2 30 min / S4 50% ED - 1200 c/h
Ambient Temperature	[°C]	-20°C to +80°C (S2) / -20°C to +60°C (S4)
Oversvoltage Category		II
Motor Protection		Thermo Switch

PSQ503
500 Nm


)¹ = Permissible average thrust over the entire travel is 50% of the max. thrust

)² = at switching torque and 50 Hz


Electrical Connection Plan

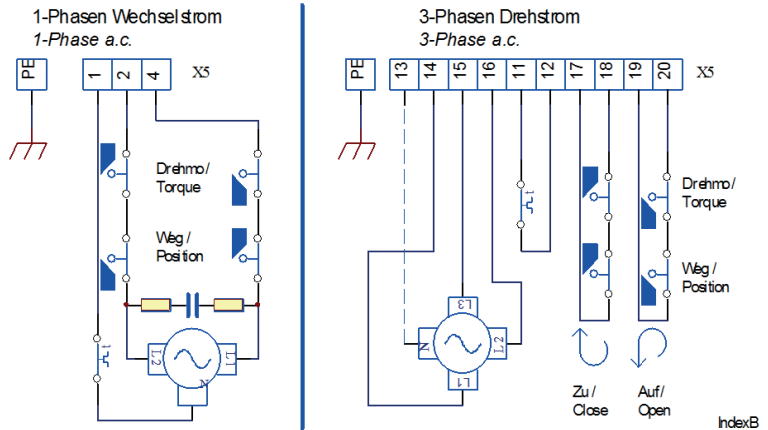

Mounting Position

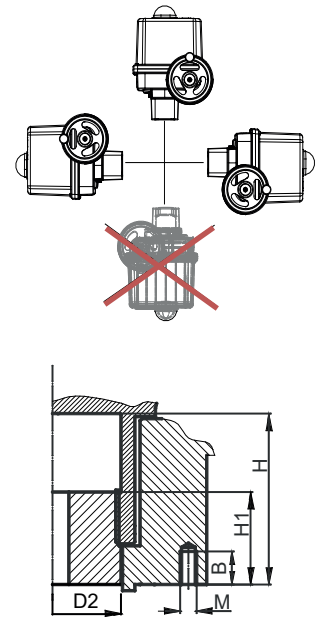

Available Drive Bushes

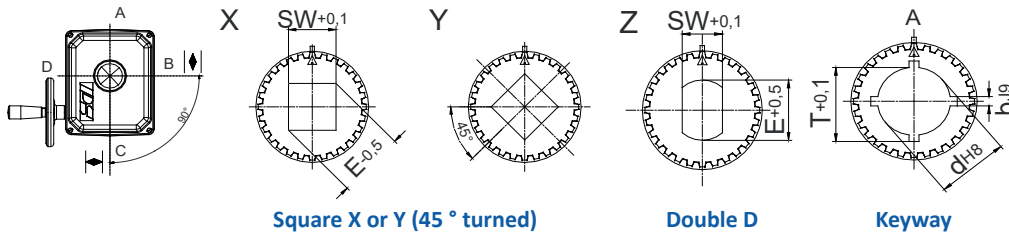

	F10	F12
D2	66	66
H	80	80
H1	48	48
M	M10	M12
B	18	18

F10 without centring!

Please check the drive bushes datasheet for the available sizes!
Other customized drive bushes on request!

Accessories/ Options	Power Supply	230 VAC 1~
	Add'l Position Switches 2WE	•
	Add'l Position Switches Gold 2WE Gold	•
	Add'l Torque Switches 2DE	•
	Add'l Torque Switches Gold 2DE Gold	•
	Positioner PSAP	•) ³
	Position Transmitter PSPT	•
	Heating Resistor HR	•
	Potentiometer PD	•
	Corrosion Protection K2	Increased corrosion protection incl. heating resistor
Increased enclosure IP	IP68) ⁴ incl. heating resistor and corrosion protection K2	

• available, for further information see respective datasheet
³ = PSAP with external relay required
⁴ = IP68, no ingress of dust and suitable for continuous immersion in water up to 6 m and 96 h

For more information and accessories, please visit our website www.ps-automation.com!

Subject to changes!